## HLW

D

С


8

The HLW (Hinge, Long, Wide) is a hinged arm with a long hinge and a wide or standard profile arm. The hinge mechanism is a double hinge. It allows the arm to position to the conductor.

It allows for downstrain applications, it is very versatile.

This is a two piece assembly. The hinge and the arm adapter are attached to the insulator cover in the factory. The arm is then installed after the insulator cover is installed and pinned. There are two different types of hinges, short and long and they are dependent upon the insulator cover design.

6

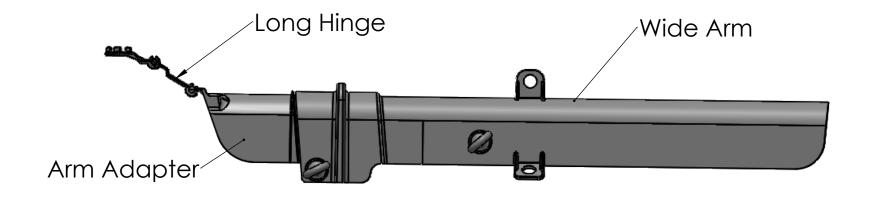

RAWING IS THE S

CO ELECTRICAL S

5

5

## Warning! 🛕

8

1. High Voltage can cause death or serious injury.

7

2. <u>This product is NOT PPE (Personal Protective Equipment)</u>. It is not designed to protect humans from electrical hazards, electrical arcs, or flashover.

3. Always follow safe working procedures, safety standards, and guidelines. Always use approved live line tools and PPE, rubber gloves, and sleeves if required, during installation, removal, and maintenance.

6

Ť	4		3		
ND CONFIDENTIAL CONTAINED IN THIS JLE PROPERTY OF YSTEMS, ANY PART OR AS A WHOLE EN PERMISSION OF YSTEMS IS	APPLICATION		DO NOT SCALE DRAWING		
	NEXT ASSY	USED ON	FINISH		
			HDPE		
			ANGULAR: MACH BEND TWO PLACE DECIMAL THREE PLACE DECIMAL INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS:	
				Q.A.	
				MFG APPR.	
				ENG APPR.	
			TOLERANCES: FRACTIONAL	CHECKED	
			DIMENSIONS ARE IN INCHES	DRAWN	
			UNLESS OTHERWISE SPECIFIED:	_	
_					

3

