Powertech

Report ID: PL-03573 REP2
Revision: 1 Issued: 2021-07-19

Eco Electrical Systems

ECC-10UC-FR Cutout Wildlife Protective Covers
IEEE 1656-2010

Powertech

REPORT OF PERFORMANCE

CLIENT/MANUFACTURER	Eco Electrical Systems 7635 Rocky Flats Ct. Reno, NV USA 89502
TEST OBJECT	ECC-10UC-FR Cutout Cover System Voltage: 27 kVrms
TESTED BY	Powertech Labs Inc. 12388 - 88th Ave, Surrey, BC Canada V3W 7R7 www.powertechlabs.com
DATE RECEIVED	2020-11-30, 2021-03-17
TEST DATE(S)	2021-01-12 to 2021-04-06
TEST SPECIFICATION	IEEE 1656-2010, Clauses 5.2, 5.3, 5.4, 5.9.3
TEST RESULT	PASS

Prepared by:

Alex Webb, EIT
Project Engineer, High Voltage Lab
Powertech Labs Inc.

Reviewed by:

PROFESSIONAL ENGINEER
PROVINCE OF BRITISH COLUMBIA
L. M. CONNAUGHTON
36033
2021-07-20

Logan Connaughton, P. Eng
Manager, High Voltage Lab
Powertech Labs Inc.

Powertech

TABLE OF CONTENTS

1 INTRODUCTION 4
2 TEST OBJECT INFORMATION 4
3 GENERAL INFORMATION 4
4 WET WITHSTAND 5
5 WET POWER FREQUENCY FLASHOVER 6
6 LIGHTNING IMPULSE WITHSTAND 7
7 HIGH CURRENT (POWER ARC) TESTS 8
APPENDIX A – LIGHTNING IMPULSE WAVEFORMS 9
APPENDIX B – HIGH-CURRENT (POWER ARC) SCHEMATIC AND WAVEFORMS 10
APPENDIX C – MANUFACTURER'S DRAWING 14
APPENDIX D – PHOTOGRAPHS OF THE TEST OBJECT 15
APPENDIX D – EQUIPMENT CALIBRATION 21
APPENDIX F – REVISION HISTORY 22

1 INTRODUCTION

At the request of Eco Electrical Systems, ECC-10UC-FR cutout wildlife protective covers, manufactured by Eco Electrical Systems, were subjected to wet withstand, wet power-frequency flashover, lightning impulse, and high-current (power arc) tests in accordance with IEEE 1656-2010 and the customer's specifications. This report summarizes the results of the tests performed.

2 TEST OBJECT INFORMATION

The test object was identified based on the nameplate information as follows:

Manufacturer:	Eco Electrical Systems
Type:	ECC-10UC-FR Cutout Wildlife Protective Cover
PAT No.:	10679815
Test fixture:	S&C SMD-20 27 kV, 150 kV BIL Fuse Cutout
Condition:	New

3 GENERAL INFORMATION

3.1 Purpose

The purpose of the test was to verify if the test object complies with the requirements of the standard.

3.2 Witnesses

None.

3.3 Tests Performed

Test Standards/Specifications

IEEE 1656-2010	Clause 5.2 – Wet withstand
	Clause 5.3 – Wet power frequency flashover
	Clause 5.4 – Lightning impulse withstand
	Clause 5.9.3 – High current (power arc) tests

4 WET WITHSTAND

General Information:

Standard	IEEE 1656-2010, Clause 5.2
Test Date	2021-04-28
Test Leader	Alex Webb

Environmental Conditions:

Ambient temperature	20.4 °C
Barometric Pressure	767 mmHg

Precipitation Conditions:

Vertical rain rate	1.1 mm/min
Horizontal rain rate	1.7 mm/min
Conductivity	100.4 µS/cm

Test Conditions:

Test voltage	18.7 kV
Frequency	60 Hz

Three ECC-10UC-FR cutout wildlife protective covers were installed on an S&C SMD-20 27 kV, 150 kV BIL polymer fuse cutout with the fuse in the closed position. The cutout was mounted on a crossarm and fitted with bare #6 AWG conductor and energized to 120% of rated line-to-ground voltage.

The wildlife protective cover was then subjected to a wet withstand test using Option 1 – Moving electrode. A live-line tool with a grounded probe was brought in contact with and moved across the entire surface of the guard to within 5 cm of the bare energized conductor. The test was repeated on all 3 samples of wildlife protective covers.

The test was then repeated on all 3 covers with an alternate design of ribbed locking pins and on all 3 samples without the front extension in place. At the request of the customer, the test was repeated on all three wildlife protective covers using insulated #6 AWG conductor. In this case, the grounded electrode was moved across the entire surface of the guard. This test was performed using the normal locking pins without the front extension in place.

Photographs of the test setup and ribbed pins can be found in Appendix D.

Requirements:
The wildlife guard passes the test if all three samples do not puncture or flash over.

Evaluation:
No punctures or flashovers occurred as the grounded probe was brought in contact with and moved across the entire surface of the guard to within 5 cm of the bare energized conductor in any of the sample configurations, or when the grounded probe was swept over the entire surface of the guards with insulated conductor installed.

Extension	Pins	Conductor	Surfaces Touched	Result
In Place	Regular	Bare #6 AWG	Up to 5 cm	PASS
Removed	Regular	Bare #6 AWG	Up to 5 cm	PASS
Removed	Ribbed	Bare #6 AWG	Up to 5 cm	PASS
Removed	Regular	Insulated #6 AWG	All	PASS

Result
PASS

5 WET POWER FREQUENCY FLASHOVER

General Information:

Standard	IEEE 1656-2010, Clause 5.3
Test Date	2021-04-29
Test Leader	Alex Webb

Environmental Conditions:

Ambient temperature	19.5 °C
Barometric Pressure	765 mmHg

Precipitation Conditions:

Vertical rain rate	1.1 mm/min
Horizontal rain rate	1.7 mm/min
Conductivity	100.4 µS/cm

Test Conditions:
An S&C SMD-20 27 kV, 150 kV BIL polymer fuse cutout was subjected to 5 power-frequency flashovers in accordance with ANSI C29.1-1988 with the fuse in the closed position. The cutout was then fitted with an ECC-10UC-FR wildlife protective cover and the power-frequency flashover test was repeated. The test was performed on 3 samples of wildlife protective covers.

Photographs of the test setup can be found in Appendix D.

Requirements:
The wildlife protective covers pass the test if the average flashover value of all three samples is not less than 90% of the value obtained on the fuse cutout alone.

Evaluation:

Sample	Individual Uncorrected Flashover values (kV)					Average uncorrected flashover (kV)	Average corrected flashover (kV)
Cutout only	100.2	100.0	97.5	97.8	95.1	98.1	97.9
2276-10B	103.7	103.0	87.3	98.1	93.6	97.1	97.0
2276-11B	95.9	94.0	92.1	91.0	91.1	92.8	92.7
2276-12B	86.9	89.6	89.7	93.9	90.0	90.0	89.9

The average flashover value of each device exceeded 90% of the fuse cutout alone.

Result
PASS

6 LIGHTNING IMPULSE WITHSTAND

General Information:

Standard	IEEE 1656-2010, Clause 5.4
Test Date	2021-02-03
Test Leader	Alex Webb

Environmental Conditions:

Ambient temperature	16.7 °C
Relative Humidity	43.2 %
Barometric Pressure	761 mmHg

Test Conditions:

Specified test voltage:	150 kV_{peak}
Corrected test voltage:	151.9 kV_{peak}
Waveform:	1.2/50 µs

Three ECC-10UC-FR wildlife protective covers were mounted, one at a time, on to a S&C SMD-20 27 kV, 150 kV BIL polymer fuse cutout. The fuse cutout and covers were then subjected to 3 positive and 3 negative lightning impulses with the fuse cutout in each of the following configurations:

Configuration	Fuse position	HV Applied	Grounded
Terminal-to-ground	Closed	Upper Terminal	Bracket
Terminal-to-terminal	Open	Upper Terminal	Lower Terminal

Example waveforms are provided in Appendix A, and photographs of the test setup in Appendix D.

Requirements:
If no disruptive discharge occurs during any of the three consecutive impulses, then the device has passed the test. If more than one disruptive discharge occurs, then the device has failed the test. If one disruptive discharge occurs, then nine additional impulses of the test voltage specified are applied, and if no disruptive discharge occurs, then the device has passed the test. If failure occurs in a non-self-restoring part of the insulation, then the device has failed the test

Evaluation:
No flashovers were observed. The test fixture and wildlife protective covers withstood all impulses.

Result
PASS

7 HIGH CURRENT (POWER ARC) TESTS

General Information:

Test Standard	IEEE Standard 1656-2010, Clause 5.9.3
Test Date	2021-04-06
Test Leader	Eric Li

Environmental Conditions:

Ambient temperature	8-15 °C
Relative Humidity	48-65 %

Test Conditions:

High current (power arc) tests were performed at 60 Hz using the single-phase circuit shown in Figure 1. The tests were performed at 15.6 kV phase-to-ground for a 27 kV rated system. Three samples were tested with the same S&C 27 kV fuse cutout.

In each test, the source side terminal of the cutout was connected to the lab power source with #6 AWG bare copper wire; the mounting bracket was connected to lab ground; the load side terminal of the cutout was not connected. A #24 AWG copper fuse wire was installed across the surface of the wildlife guard sample, between the source side terminal of the cutout and the mounting bracket bolt. Pictures of the test setup are provided in Figures 7 and 8.

The test values measured during testing are given below:

Test No.	Sample No.	Source Voltage [kV_{rms}]	Current		Waveform
			Symmetrical [kA_{rms}]	Duration [ms]	
#1	2276-7B	15.9	10.2	175	Figure 4
#2	2276-8B	15.9	10.3	175	Figure 5
#3	2276-9B	15.9	10.3	175	Figure 6

Requirements:
The wildlife guard passes the test if the samples self-extinguish without signs of melting.

Evaluation:
The three samples completed the tests with no flames or signs of melting. A picture of the samples after the test is provided in Figure 11.

Result
PASS

APPENDIX A – LIGHTNING IMPULSE WAVEFORMS

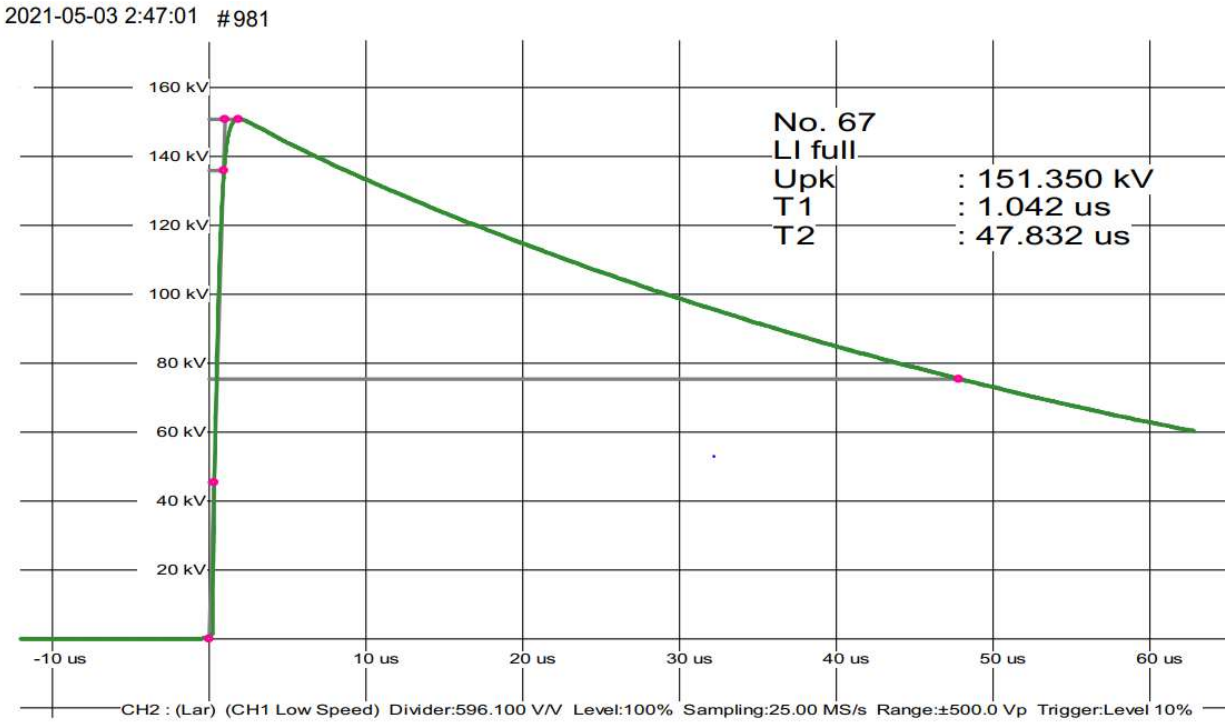

Figure 1. Example positive lightning impulse waveform

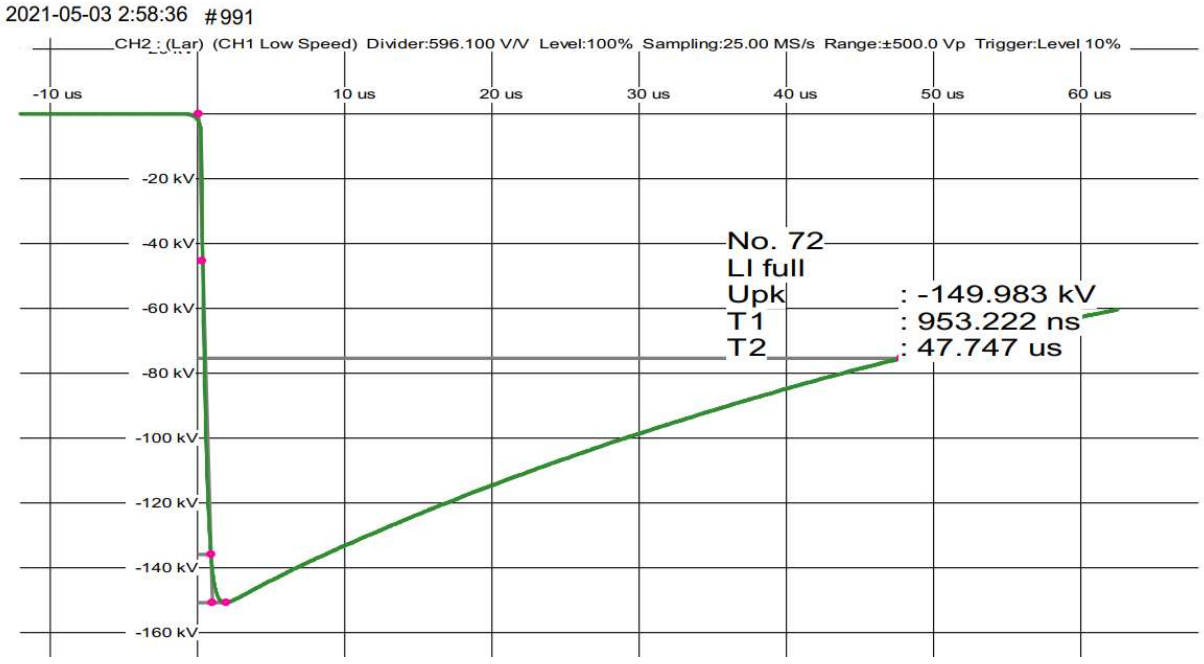

Figure 2. Example negative lightning impulse waveform

APPENDIX B – HIGH-CURRENT (POWER ARC) SCHEMATIC AND WAVEFORMS

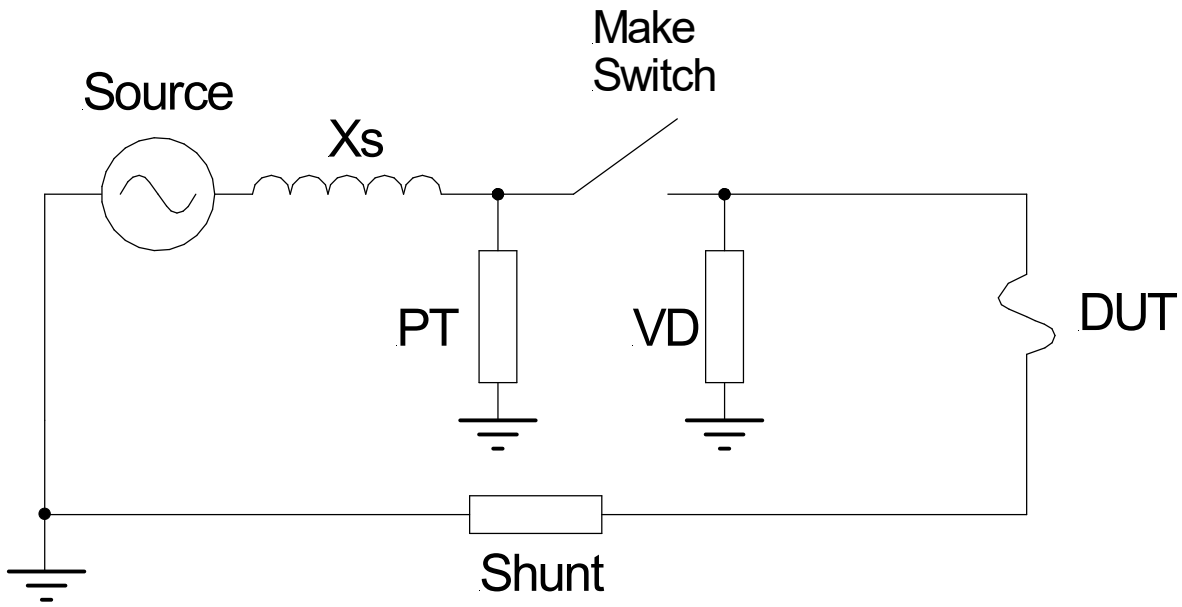

Figure 3. Test circuit schematic.

Notes:

1. *Xs – Source current limiting reactance*
2. *PT, VD – Source voltage measurements*
3. *DUT – Device under test*
4. *Shunt – Current measurements*

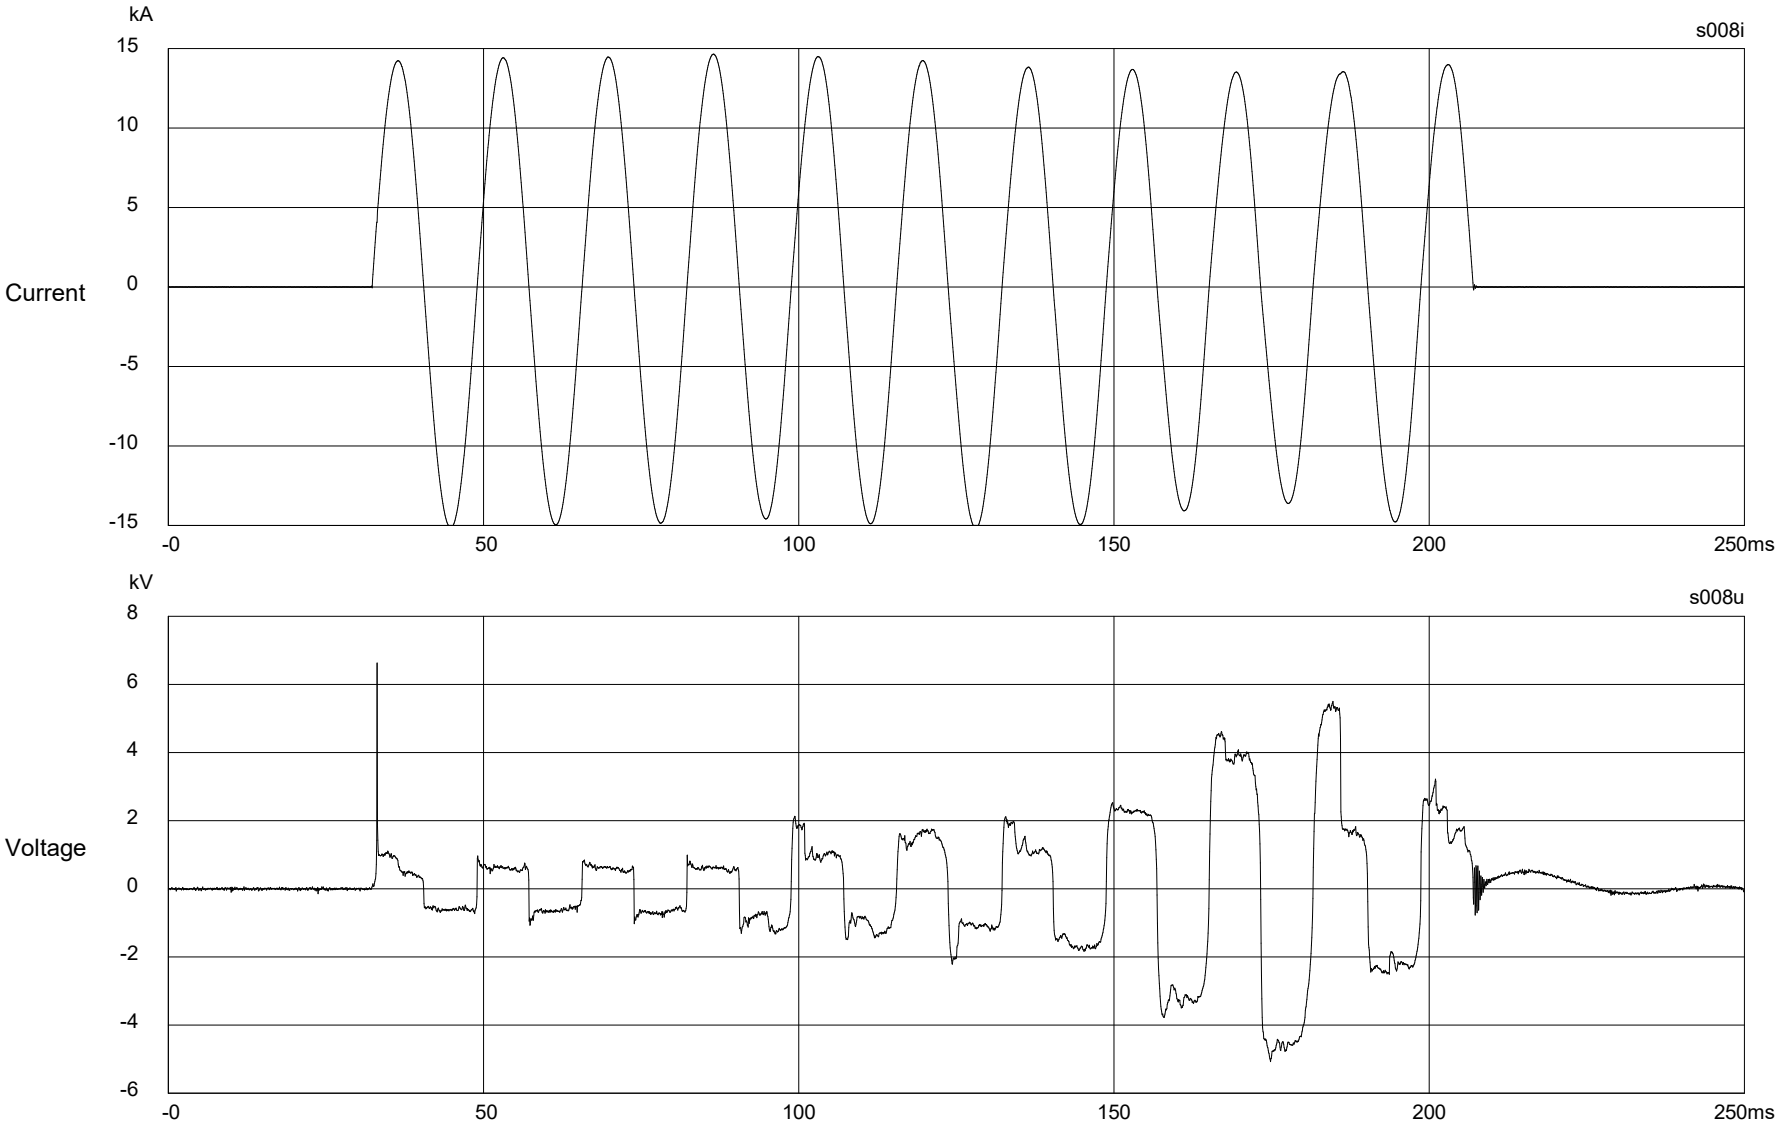

Figure 4: Waveforms for Test #1 on sample #2276-4A.

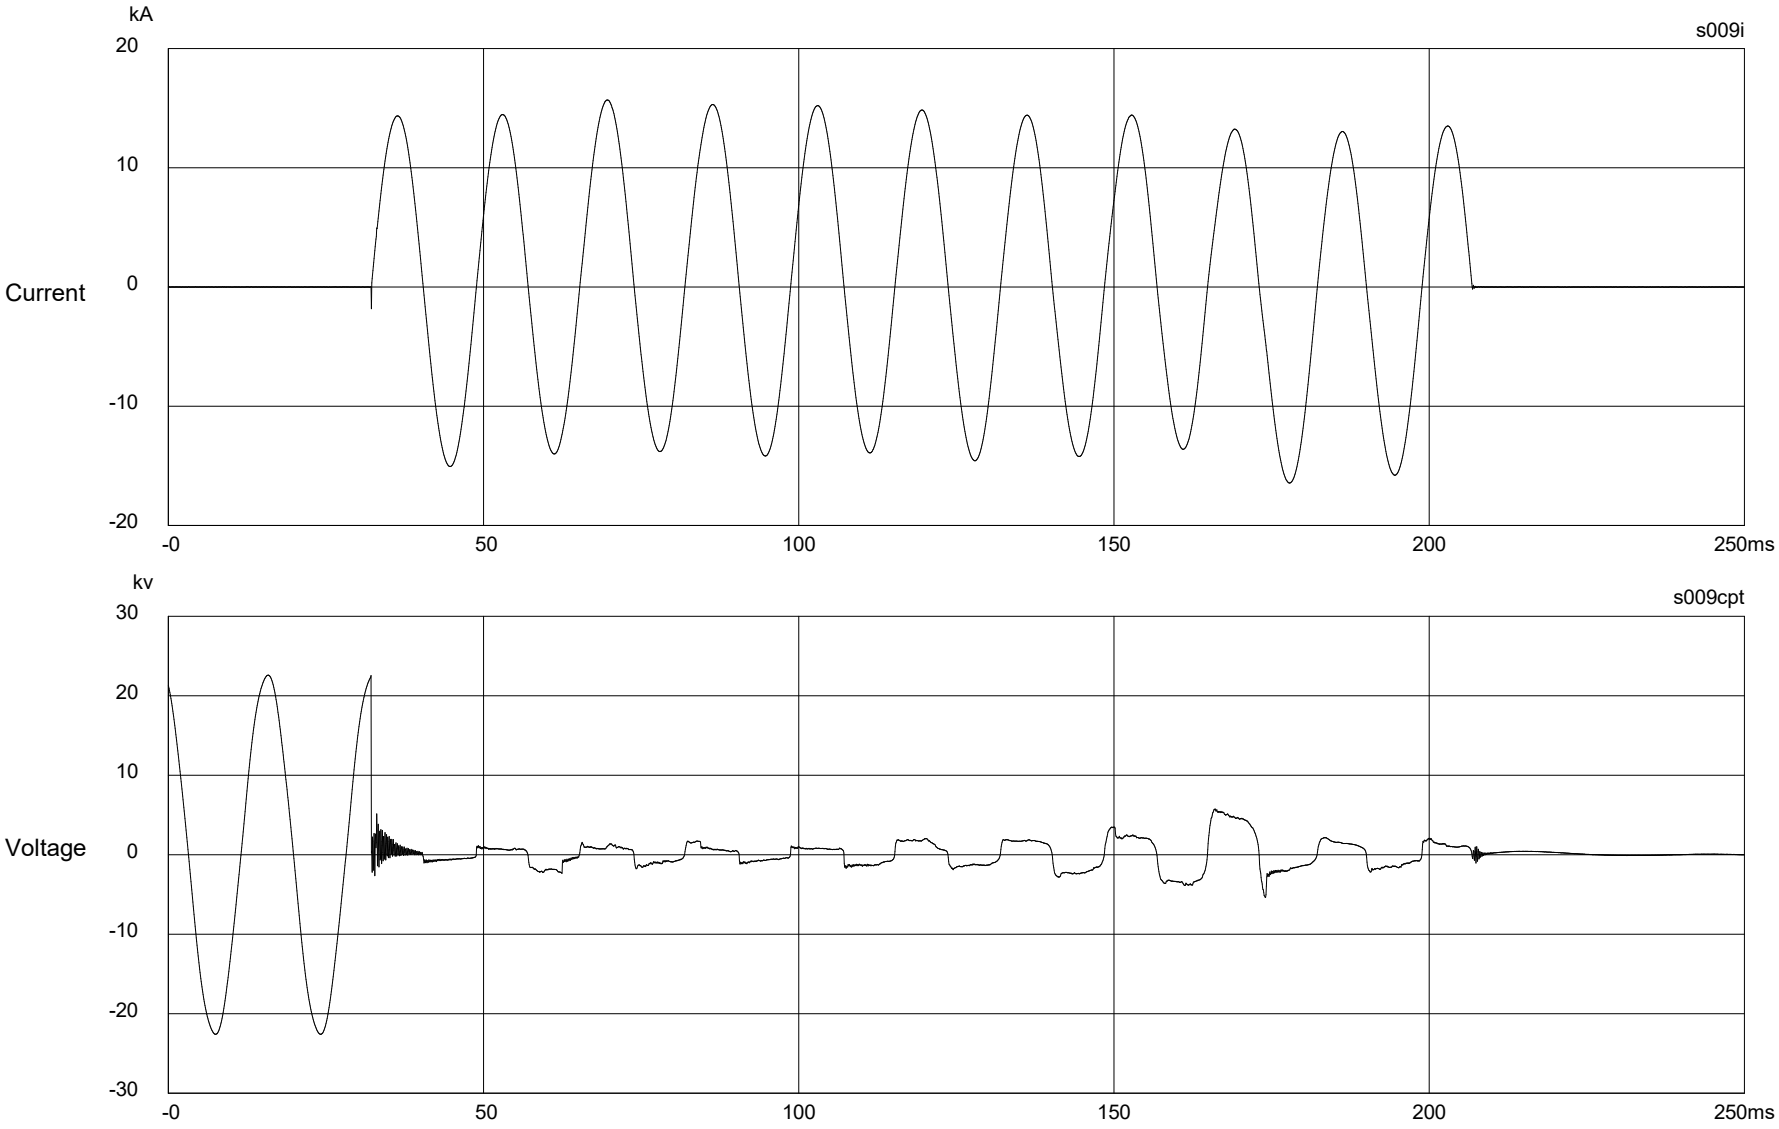

Figure 5: Waveforms for Test #2 on sample #2276-5A.

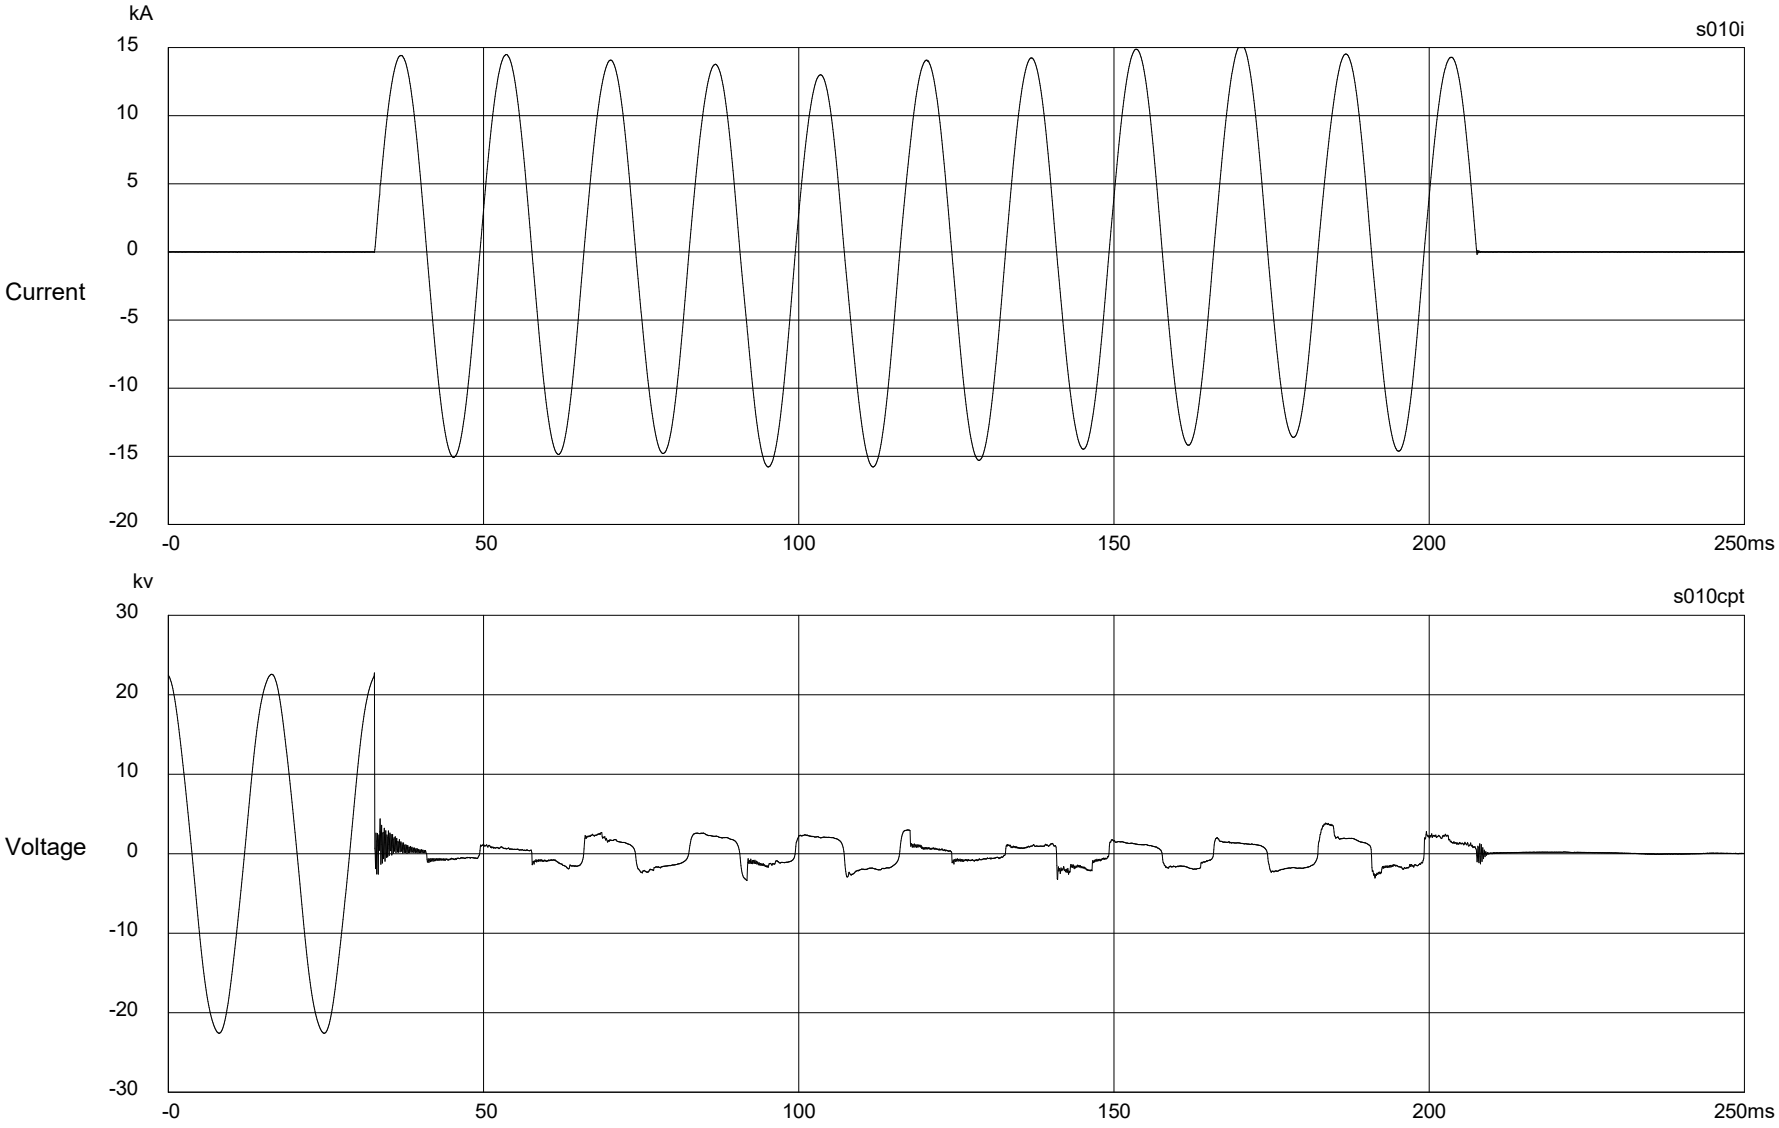

Figure 6: Waveforms for Test #3 on sample #2276-6A

ECC-10UC-FR

Designed for the S&C SMD 20 cutouts, porcelain and polymer.
Cruciforms for adding the extension to the front for added coverage.

UL 94 5VA rated.

For porcelain insert the pins high and low as shown.
For polymer insert pins in the lower two holes.



Side View





Bottom View

Warning!

1. High Voltage can cause death or serious injury.

2. <u>This product is NOT PPE (Personal Protective Equipment)</u>. It is not designed to protect humans from electrical hazards, electrical arcs, or flashover.

3. Always follow safe working procedures, safety standards, and guidelines. Always use approved live line tools and PPE, rubber gloves, and sleeves if required, during installation, removal, and maintenance.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE
		DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ANGULAR: MACH BEND TWO PLACE DECIMAL THREE PLACE DECIMAL	DRAWN	ML	4/14/20
			CHECKED		
			ENG APPR.		
			MFG APPR.		
		INTERPRET GEOMETRIC TOLERANCING PER:	Q.A.		
		MATERIAL FR UL 5VA Rated	COMMENTS:		
NEXT ASSY	USED ON	FINISH SMOOTH			
APPLICATION		DO NOT SCALE DRAWING			

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF ECO ELECTRICAL SYSTEMS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ECO ELECTRICAL SYSTEMS IS PROHIBITED.

TITLE: ECC-10UC-FR

SIZE	DWG. NO.	REV
B		1

WEIGHT: SHEET 1 OF 1

APPENDIX D – PHOTOGRAPHS OF THE TEST OBJECT

Figure 7. Lightning impulse withstand test setup

Figure 8. Wet withstand and wet power-frequency flashover test setup

Figure 9. Ribbed pins

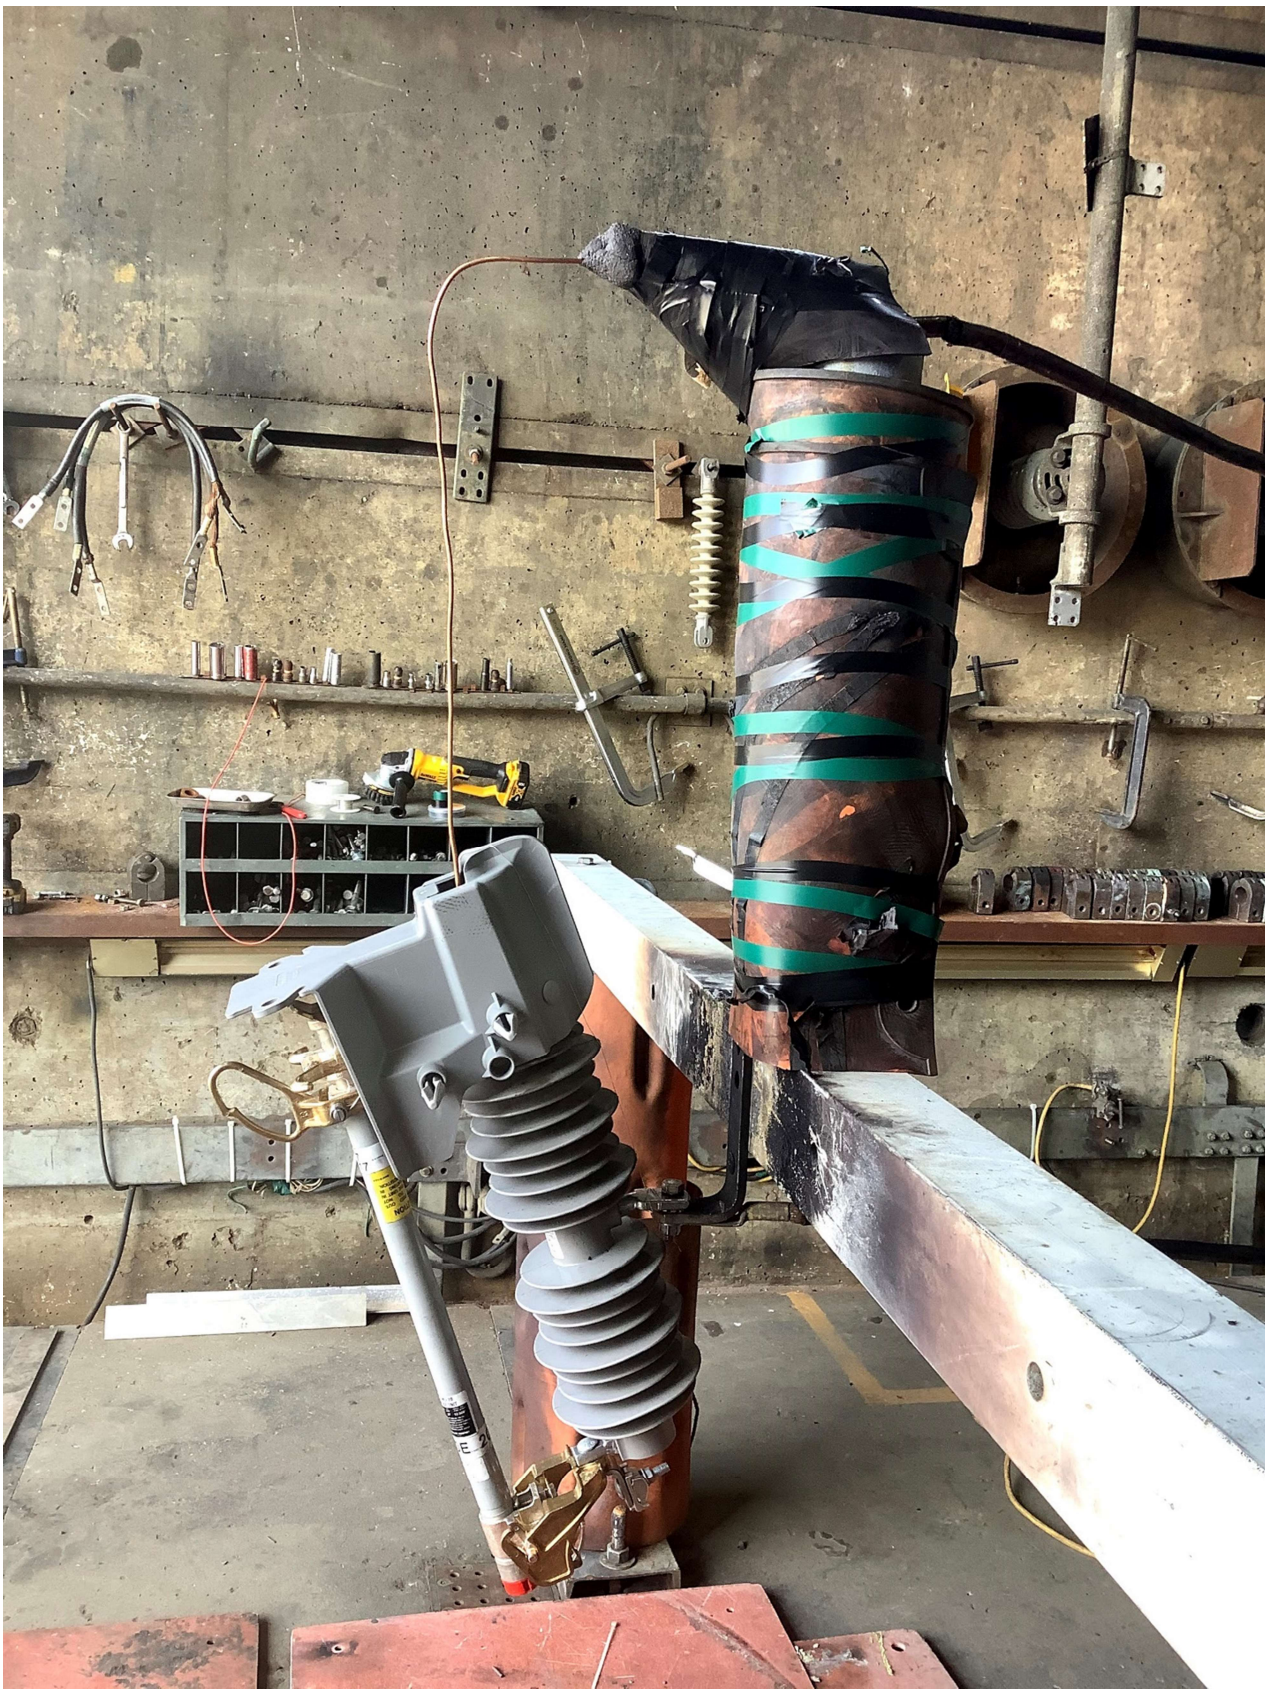

Figure 10: Setup for the high current (power arc) tests.

Figure 11. Setup for the high current (power arc) tests, fuse wire.

Figure 12. Samples after the high current (power arc) tests.

APPENDIX D – EQUIPMENT CALIBRATION

Description	Manufacturer	Model	Powertech ID	Calibration Due
AC voltage divider	Phenix	DVD200X	10348	June 12, 2021
Multimeter	Fluke	289	34046	March 15, 2022
HV impulse analyzer	Haefely	HiAS 744	34642	Feb. 17, 2023
Ratio meter	Haefely	RM430	HV031146	August 20, 2021
Conductivity meter	Oakton	CON150	34601	Oct. 1, 2021
Weather station	Control Company	76047-584	34193	July 25, 2021

Powertech

APPENDIX F – REVISION HISTORY

Revision	Document Date	Description of Change
0	2021-05-12	New document.
1	2021-07-19	• Client address corrected • Wildlife cover model number corrected in multiple locations